
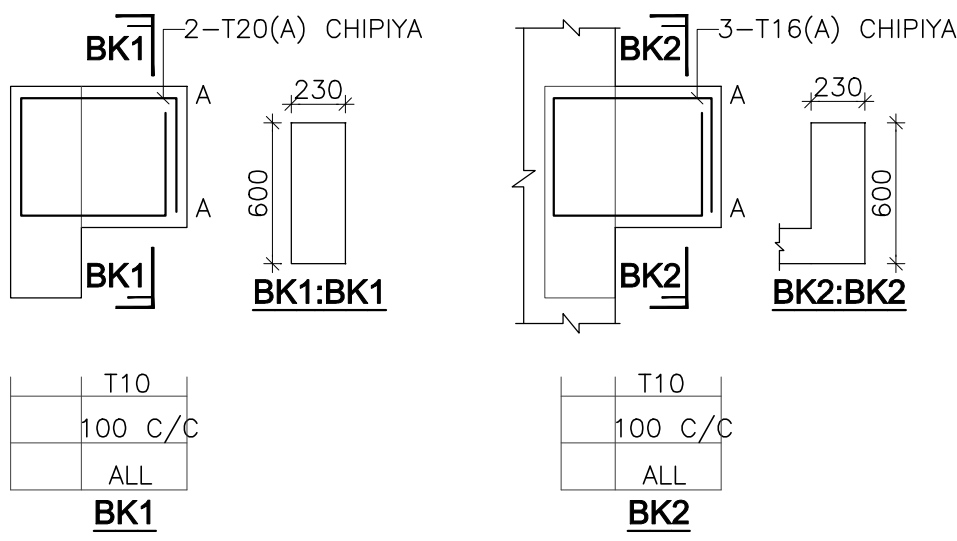


BEAM NUMBERS	SIZE		BOTTOM REINFORCEMENT			TOP REINFORCEMENT			SHEAR STIRRUPS			SFR	DIAGONAL	REMARKS
	B	D	LEFT	MID SPAN	RIGHT	LEFT	MID SPAN	RIGHT	LEFT	MID SPAN	RIGHT			
B88b	230	750	3-T20	3-T20 + 3-T16	3-T20	3-T20 + 3-T20	3-T20	3-T20 + 3-T20	2L-T10@100 C/C	2L-T10@150 C/C	2L-T10@100 C/C	2-T8EF	-	-
B89	450	750	4-T25 + 2-T20	4-T25 + 2-T20	4-T25 + 2-T20	4-T20 + 4-T25	4-T20 + 4-T25	4-T20 + 4-T25	4L-T10@100 C/C	4L-T10@100 C/C	4L-T10@100 C/C	3-T12EF	-	-
OMITTED BEAM NO:-B32,B41,B49														

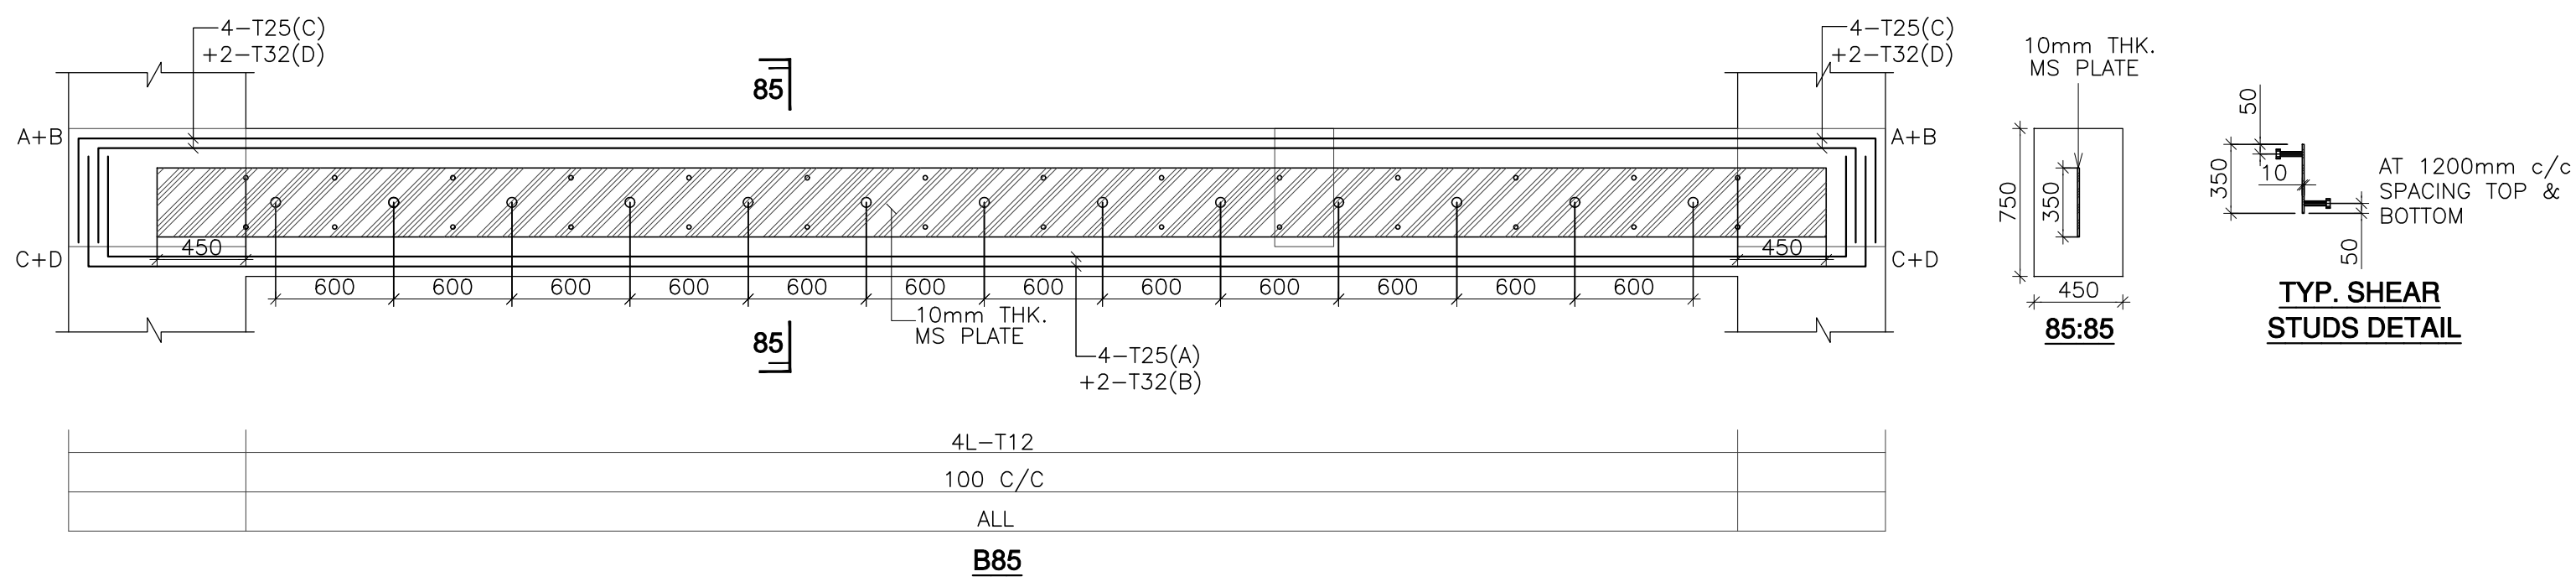

GENERAL NOTES :-
1. ALL DIMENSIONS ARE IN MM.
2. FOR ALL NOTES, REFER OUR DRG NO: NSC_SWD_GEN_STD-01 & NSC_SWD_GEN_STD-02

GOOD FOR CONSTRUCTION
ISSUE ON DATE: 16.09.2022


PRINT ISSUED									
Date	Rev.	Arch.	Client	Site	Cons.	Contr.	Office	Total	Remark
16/09/22	-	M+06	MAIL	-	-	-	01	07	G.F.C

NO.	DATE	REVISION	BY	DR	CH

CLIENT

AHMEDABAD MUNICIPAL CORPORATION

ARCHITECTS



SACHIN GANDHI & ASSOCIATES

Office: "Dev" 1481/B, Murl Bungalows, Opposite Navlivan Press, Income Tax, Ahmedabad - 380014, Gujarat (India).

Ph.: +91 90999 41399
+91 79 27540541
Fax: +91 79 26540544


W: www.sachingandhiarchitects.com
E: info@sachingandhiarchitects.com

JOB TITLE

NARANPURA SPORTS COMPLEX

DRAWING TITLE				
STRUCTURAL BEAM SCHEDULE AT 3rd & 4th FLOOR ROOF SLAB LVL. (CENTER SPORT EXCELLENCE- BLOCK-B)				
JOB NO.	DATE	DRG. NO.	REVISION	
4721	30-06-22	NSC_SWD_B_04_204	R/0	
SCALE	SHEET SIZE	DRAWN	DESIGN	CHECKED
1:100	24x36	VIDHI	BHAUMIK	DHRUV

STRUCTURAL CONSULTANT



DUCON

CONSULTANTS PRIVATE LIMITED
A3-A4,3rd FLOOR, SAFAL PROFITAIRE, CORPORATE ROAD,NR.AUDA GARDEN, PRANILNAGAR AHMEDABAD - 380051.
E-mail:contact@duconconsultants.in
PH.79-40073195,29705245,29705246